

## Technical specification sheet


# CCU10 | Mini Cutter

Specifications		
article number		151.001.500
model		CCU10
short description		Mini Cutter
max. working pressure	bar/Mpa	720 / 72
battery included		yes
max. cutting opening	mm	59
theoretical cutting force	kN/t	220 / 22.4
protection rate		IP54
sound emission @ 1m/3.25ft	dB(A)	74
sound emission @ 4m/13ft	dB(A)	65
hydraulic oil type		ISO-L HV VG 36
cutter jaw		inclined
weight, ready for use	kg	4.9
temperature range	°C	-20 + 55
weight excl. battery	kg	4.5
dimensions (AxBxC)	mm	554 x 154 x 92
EN 13204 compliant		yes
EN 13204 classification		AC59B-4.9
EN 13204, cutting capacity		1D 2D 3C
NFPA 1936 compliant		yes
NFPA 1936, cutting capacity		A4 B3 C2 D4 E4
round bar (S235 acc. to EN 13204)	mm	22

Safety factors / tests	
hydraulic safety factor	2:1
endurance test tool	1000 cycles of biting in material that cannot be cut
endurance test dead man's button	6000 cycles

Standard supplied with	
<ul style="list-style-type: none"> <li>• i-Bolt Technology</li> <li>• Integrated LED lighting</li> <li>• Two 18V 2Ah batteries CBPA182</li> </ul>	

Required Accessories	
Battery charger CBCH1 (AC-EU)	151.002.112
Battery charger CBCH5 (AC-UK)	151.002.113
Battery charger CBCH7 (AC-AU/NZ)	151.002.114
Battery charger CBCH2 (AC-US)	159.000.212

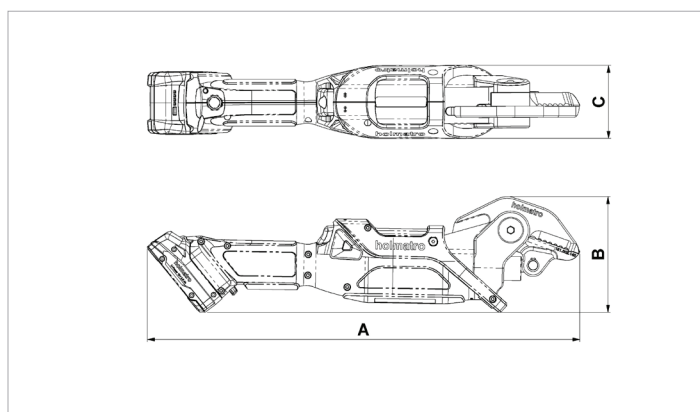

[holmatro.com](http://holmatro.com)

© Holmatro 2023-12-29

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.