

Technical specification sheet


GDR200EVO3 | Door Ram

Specifications		
article number		151.001.492
model		GDR200EVO3
short description		Door Ram
max. working pressure	psi	10443
battery included		no
spreading stroke	in	11.8
retracted length	in	28.7
extended length	in	40.5
spreading force over full stroke	lbf	15961
protection rate		IP54
sound emission @ 1m/3.25ft	dB(A)	74
sound emission @ 4m/13ft	dB(A)	65
operator type		battery
hydraulic oil type		ISO-L HV VG 15/22
weight, ready for use	lb	29.5
temperature range	°F	-4 +131
dimensions (AxBxC)	in	7.6 x 28.7 x 10.9
weight (excl. battery)	lb	27.3

Safety factors / tests	
hydraulic safety factor	2:1
endurance test tool	1000 cycles of spreading while the tool is loaded
endurance test dead man's handle	6000 cycles

Required Accessories	
Greenline Battery Charger BCH1 EU	150.182.208
Greenline Battery Charger BCH2	150.182.209
Greenline Battery Charger BCH3	150.182.286
Greenline Battery BPA286	151.000.307

Accessories	
Mains Power Connector BMC1	150.182.206
Mains Power Connector BMC2	150.182.207
Battery Pouch	150.182.214
Carrying Harness	150.553.115

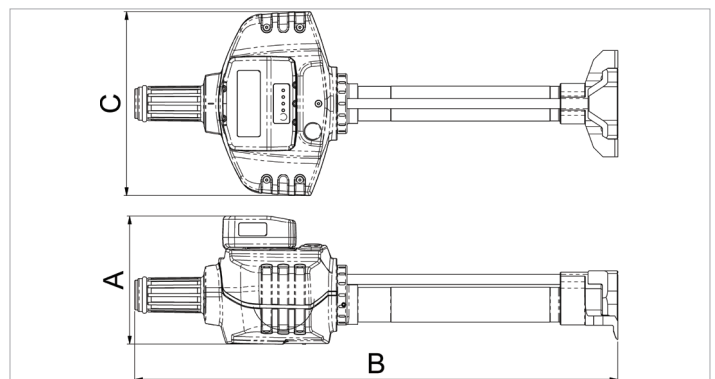

holmatro.com

© Holmatro 2024-07-20

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.